

## Fully-offset Trailed Grass Toppers

Available in 2.74m (9ft) Heavy Duty (TOP9T) and 2.5m (8ft) Std (TOP8T)

- For the professional operator on parkland, sports fields, airports, equestrian and agricultural use.

### 2.74m (9ft) Super 900 Topper Trailed

- Low cost spares and maintenance
- Adjustable cutting height from 50mm – 200mm
- The only topper to be fitted with HD 70 h.p. gear box with flexible knuckle drive-line protected by rubber couplings and shear bolt against rotor impact

All pivot points are of heavy duty design and fitted with grease nipples for smooth operation and long life

Hydraulic anti-breakaway protection fitted as standard, for the ultimate safety when in transport position

Spring loaded safety mechanism fitted on the drive line to prevent damage on very undulating ground

Lift arm draw-bar combined with Wide Angle PTO for better manoeuvrability and tighter turning when operating

Fitted with free floating deck with spring assisted body floatation to provide Bi-Lateral movement, creating minimal stress resistance on the machine allowing the unit to glide over the ground when in operation keeping the blades at an even cutting height at all times

Heavy duty one piece 3mm deck with reinforcing across the length of the body of the topper for absolute rigidity

Reinforced 4mm side skids with specially designed convex runners combine with the free floatation system to allow the topper to float over the ground practically eliminating skid marks even on tight turns

Oversized tyres (10.5 x 75 x 15.3) on a reinforced wheel carriage with greased heavy duty pivot points for smooth operation and longer life

The deck is carried on Heavy Duty chains with an Anti-Rocking mechanism fitted to the deck for when in transport mode to prevent self damage



Indestructible HD spring steel rotors fitted with specially designed long life hardened steel cutting blades with offset flute combine with mulching blades to disperse grass evenly. Blades are free floating in the event of collision



Hinged bolt on safety guard with protective skirt for ultimate safety and easy maintenance

## Specifications

Code	TOP3	TOP4	TOP5	TOP6	TOP6SM	TOP7SF	TOP8SF	TOP9	TOPHDIN	TOP8T	TOP9T
Tractor HP Req'd	20	20	30	40	40	70	80	70	80	80	80
Transport Width	1.17m	1.2m	1.5m	1.82m	1.82m	1.83m	1.83m	2.74	2.74	2.53m	2.80m
No. of Rotors	1	1	1	1	1	2	2	2	2	2	2
No. of Blades	2	2	2	2	2	4	4	4	8	4	8
No. of Gearbox	1	1	1	1	2	3	3	3	3	3	3
Gearbox Rating	30hp	30hp	30hp	40hp	40hp	55hp	55hp	55hp	70hp	55hp	70hp
Weight	170kg	202kg	246kg	290kg	431kg	616kg	650kg	494kg	510kg	790kg	850kg

Due to a policy of continual improvement the company reserve the right to change price or specification without notice

**FLEMING AGRI-PRODUCTS LTD** Newbuildings Industrial Estate, Newbuildings, Northern Ireland BT47 2SX  
Tel: +44 (0)28 7134 2637 Fax: +44 (0)28 7134 4735 email: info@fleming-agri.co.uk www.fleming-agri.co.uk

# Grass Toppers



In-Line

Semi-offset

Super Float

Super Float Trailed

## In-Line and Semi-offset Grass Toppers

3ft3" (1m) (TOP3), 4ft (1.25m) (TOP4), 5ft (1.5m) (TOP5)

- 3ft3", 4ft and 5ft models are in-line or semi-offset
- 4ft and 5ft can have wheel attachment option
- For parkland, sports fields, equestrian and agriculture
- Low cost spares and maintenance


- **6ft (1.8m) Semi-offset only (TOP6)**
- Fitted with HD comer gear box
- Optional cat. 1 and 2 three point linkage settings for different size tractors



1m topper



Closed in safety guard built into frame.

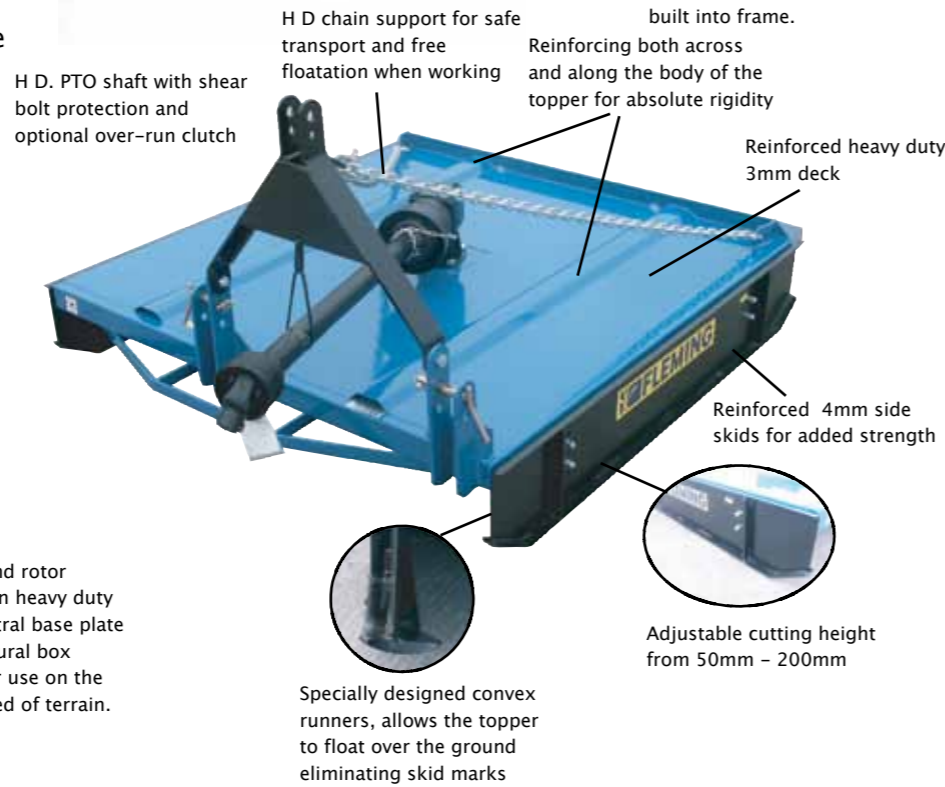

H D. PTO shaft with shear bolt protection and optional over-run clutch

H D chain support for safe transport and free floatation when working

Reinforcing both across and along the body of the topper for absolute rigidity

Reinforced heavy duty 3mm deck

Reinforced 4mm side skids for added strength

Adjustable cutting height from 50mm - 200mm

Specially designed convex runners, allows the topper to float over the ground eliminating skid marks

Blades can do 360 degree rotation in the event of collision

Indestructible HD spring steel rotor.



Specially designed hard-wearing Hardened steel blades with offset flute to disperse grass evenly.

Gearbox and rotor mounted on heavy duty 12mm central base plate with structural box support for use on the most rugged of terrain.

## In-Line Topper

Available in 9ft (2.74m) Standard (TOP9)

- Reinforced 4mm side skids with convex runners.
- Indestructible HD spring steel rotors fitted with specially designed long life hardened steel cutting blades with offset flute to disperse grass evenly, blades are free floating in the event of collision
- Gearbox and rotors mounted on a one piece heavy duty central base plate with structural box support for use on the most rugged of terrain
- Heavy duty one piece 3mm deck with reinforcing across the length of the body of the topper for absolute rigidity.
- Fitted with HD 55h.p Comer gear box with straight drive-line protected by rubber couplings with PTO over-run and shear bolt against rotor impact
- Grass wind-up protection.
- H.D galvanised chain support.
- Low cost spares and maintenance.

**Super 900 model (TOP9INH)**

- Fitted with mulching blades to chop and disperse grass evenly
- Fitted with HD 70h.p Comer gear box with flexible knuckle drive-line protected by rubber couplings and shear bolt against rotor impact



## Super Float Grass Topper

6ft (1.8m) (TOP6SM)

- Reinforced 4mm side skids with convex runners and Bi-lateral floatation system allows the topper to float over the ground minimising skid marks, allowing the blades to stay at an even cutting height at all times
- Fitted with single HD comer gear box
- Specially designed long life hardened steel blades with offset flute to disperse grass evenly
- H D. PTO shaft with shear bolt protection against impact.
- Indestructible single HD spring steel rotor with free floating blades in the event of collision

Twin column support arm with heavy duty 25mm greased pivot points

Parking jack as standard

Manual transfer from working to transport position




Floating top link for bi-lateral movement



Available in 7ft (2.14m) (TOP7SF), 8ft (2.5m) (TOP8SF) & 8ft Heavy Duty Model (TOP8SFHD)

- Fitted with floating top link and spring assisted body floatation to provide Bi-Lateral movement, creating minimal stress resistance on the machine when in operation and allowing the blades to stay at an even cutting height at all times.
- For parkland, sports fields, airports, equestrian and agriculture.
- Low cost spares and maintenance

- **8ft HD Superfloat (TOP9INH)**
- **Heavy Duty drive line**
- **Heavy Duty 60hp gearboxes**

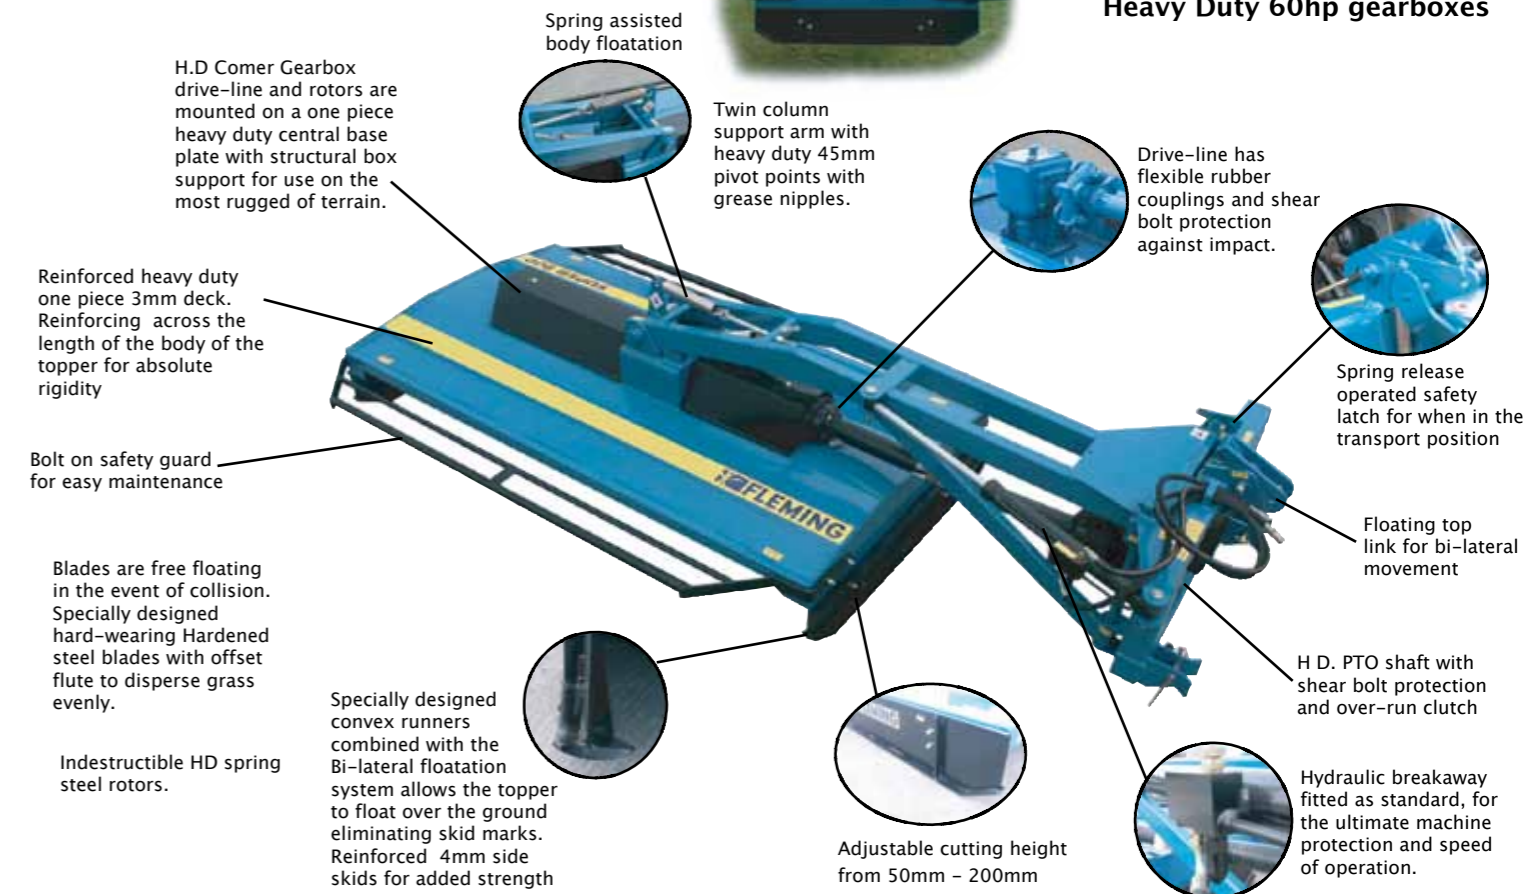

Spring assisted body floatation

H.D Comer Gearbox drive-line and rotors are mounted on a one piece heavy duty central base plate with structural box support for use on the most rugged of terrain.

Twin column support arm with heavy duty 45mm pivot points with grease nipples.

Drive-line has flexible rubber couplings and shear bolt protection against impact.

Spring release operated safety latch for when in the transport position

Floating top link for bi-lateral movement

H D. PTO shaft with shear bolt protection and over-run clutch

Hydraulic breakaway fitted as standard, for the ultimate machine protection and speed of operation.

Reinforced heavy duty one piece 3mm deck. Reinforcing across the length of the body of the topper for absolute rigidity

Bolt on safety guard for easy maintenance

Blades are free floating in the event of collision. Specially designed hard-wearing Hardened steel blades with offset flute to disperse grass evenly.

Indestructible HD spring steel rotors.

Specially designed convex runners combined with the Bi-lateral floatation system allows the topper to float over the ground eliminating skid marks. Reinforced 4mm side skids for added strength

Adjustable cutting height from 50mm - 200mm